

# Kidde Fire Protection

## NATURA™ (400 Series) Inert Gas System

### Component Description

#### 2" Adapter BSPT to NPT, Female to Female

#### FEATURES

- For Approvals, see the "COMPATIBILITY" table.
- REACH and RoHS compliant

#### DESCRIPTION

Use this adapter (P/N 38-351000-001) to convert the BSPT manifold outlet piping to NPT piping.

#### SPECIFICATIONS

- Working Pressure: 105 bar (1522 psi)
- Body Material: Steel - Galvanised
- Weight: 1.4 kg (3 lbs)

#### Temp Range(s):

- ISO/EN: -20° to 50°C (-4° to 122°F)
- FM Approved / UL Listed: -20° to 54°C (-4° to 130°F)\*

\*Unless superseded by local/national standards




#### ORDERING INFORMATION

Part Number	Description
38-351000-001	2" Adapter, BSPT to NPT, Female to Female

#### COMPATIBILITY

Series	DIOM P/N	Approvals*
Natura IGS system	06-237518-001	LPCB, FM, UL
* For additional listings, contact Kidde Fire Protection		

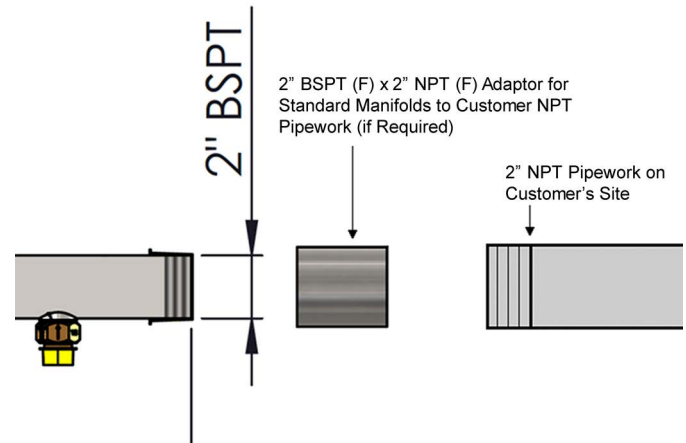

This literature is provided for informational purposes only. Kidde-Fenwal, LLC believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. Kidde-Fenwal, LLC assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, LLC, Ashland, MA 01721.

Kidde-Fenwal, LLC  
400 Main Street  
Ashland, MA 01721, USA

KFI U.K. Limited  
Station Road,  
Bentham, Lancaster, LA2 7NA, UK

Kidde Technologies  
Survey No. 28/2, 44/2 and 45  
Rasyani, Dandapta Road  
Raigad Maharashtra-410207, India