

FEATURES

- Factory Mutual (FM) Approved
- 2.75T to 60T Range
- Horizontal and Vertical Units
- R-404A Refrigerant
- Optional Dual Safety Relief Valve Sets
- High Quality Steel Construction
- Aluminum Outer Jacket Construction
- Forged Steel Fittings
- Polyurethane Insulation

DESCRIPTION

CARDOX® Bulk Low Pressure Carbon Dioxide Storage Units are available in models with storage ranges from 2.75 U.S. tons to 60 U.S. tons of liquid Carbon Dioxide. These storage units incorporate design, construction and testing in accordance with ASME (American Society of Mechanical Engineers) Boiler & Pressure Vessel Code, Section VIII, Division 1, Pressure Vessels.

These storage units (horizontal or vertical) provide a compact suppression system footprint protecting facilities.

A 4-in, minimum, thick polyurethane layer sheathed inside an aluminum outer jacket insulates the steel pressure vessel. A factory fitted low-temp air-cooled, providing maximum reliability, refrigeration package chills the CO₂ to approximately 0F (-17C) at 300-psi (20.6 bar). The refrigeration package is available in a variety of voltages, which offers global compatibility with local power requirements.

The insulation scheme and refrigeration package provides efficient continuous duty operation, affording reduced facility overhead.

As a standard factory configuration, each storage unit arrives at the project site outfitted with a single safety relief valve set and dual 6-in diameter gauges for pressure and liquid level indication.

The Factory Mutual approval certifies that these storage units are built to the highest specification and quality standards.

CARDOX Bulk Low Pressure Carbon Dioxide Storage Units offers best in class storage capacity, refrigeration package options, temperature range and lightweight construction.

AVAILABLE REFRIGERATION PACKAGE VOLTAGES

- 1 = 120V/60Hz/1-Phase
- 2 = 220V/60Hz/1-Phase
- 3 = 220V/50Hz/1-Phase
- 4 = 220V/60Hz/3-Phase
- 5 = 380V/50Hz/3-Phase
- 6 = 460V/60Hz/3-Phase
- 7 = 575V/60Hz/3-Phase




Number 1-7 range applies to the Storage Unit Stock Number "X" Placeholder. Reference the CARDOX LPCO₂ Storage Unit manual for specific voltages applicable to each LPCO₂ storage unit.

ADDITIONAL OUTFITTING OPTIONS AVAILABLE AS SHOWN BELOW:

- Liquid Level Gauge with Dual (NO/NC) Contacts
- Liquid Level Gauge with 4-20mA Output Signal
- Cold Weather Instrumentation Package
- Canadian Standards Association (CSA) Approval
- Pressurized Equipment Directive (PED) Approval
- Redundant Safety Relief Valve Set
- Heavy Wall Pressure Vessel




TECHNICAL SPECIFICATIONS

Material:	SA-612 normalized carbon steel
MAWP:	350 psig (24.1 bar)
MDMT:	-40 °F (-40 °C)
Operational Temperature, Min:	-10°F (-23.3°C)
Operational Temperature, Max:	130°F (54.4°C)
Piping:	Sch 80 seamless, 2000lb. forged fittings and ball type valves
Insulation:	4 in. polyurethane (horizontal models) 6 in. polyurethane (vertical models)
Refrigerant:	R-404A
Instrumentation:	Liquid Level Gauge, 6 in. (152.4 mm) dial Pressure Gauge, 6 in. (152.4 mm) dial Audible Alarm, High/Low Pressure

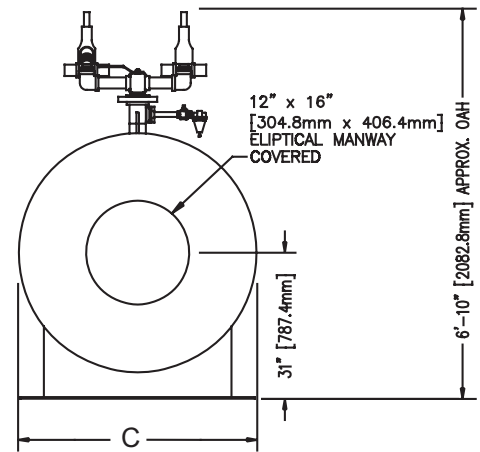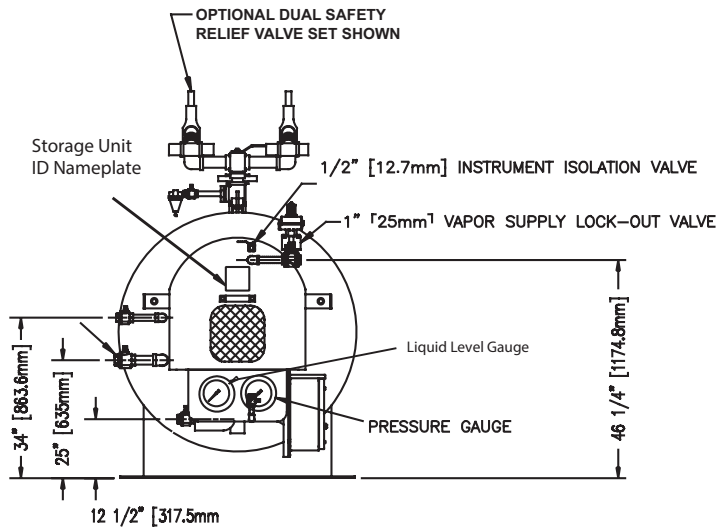
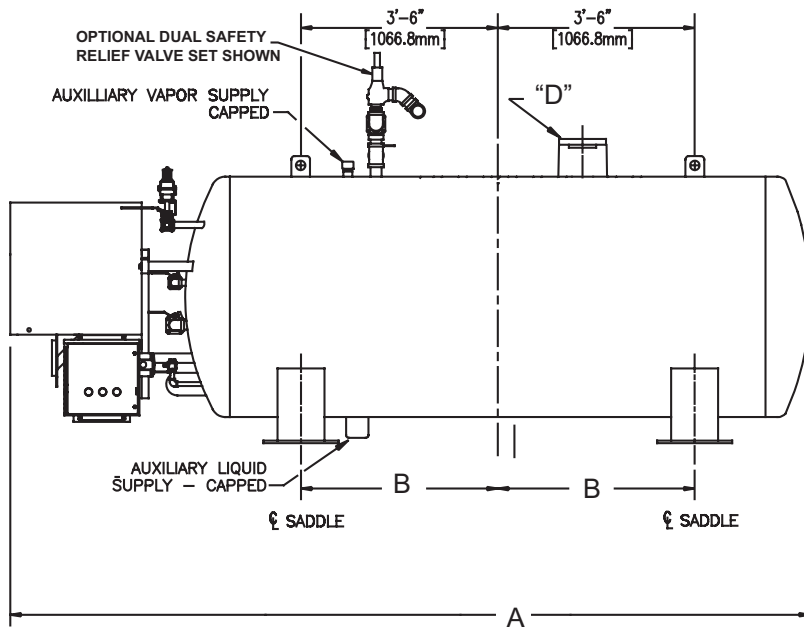


Size (Tons)	Part Number	A** *Allow 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight (Empty)
2 3/4	7048H02X	14 ft. 5 in. (4381mm)	3 ft. 6 in. (1066.8mm)	4 ft. 3 in. (1295mm)	4 in. (101mm)	4,000 lb. (1814kg)




**Add 9 in. (228.6mm) for 3 phase refrigeration units (2 3/4 ton model only)

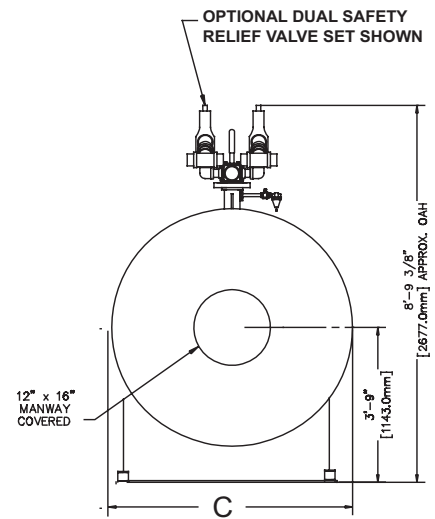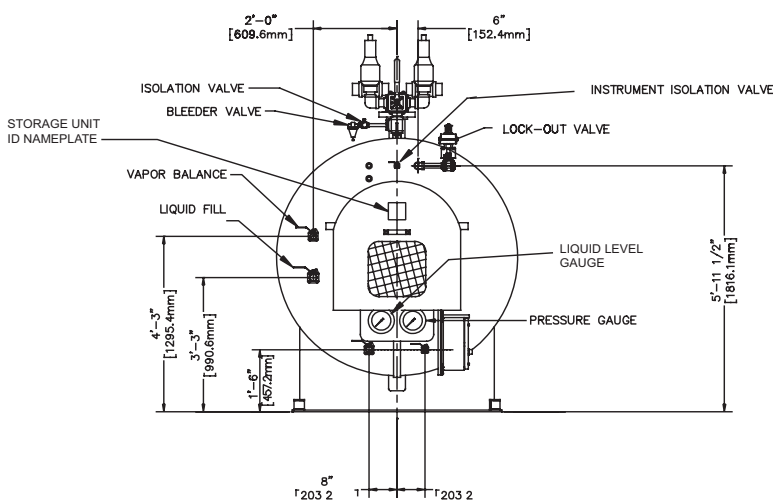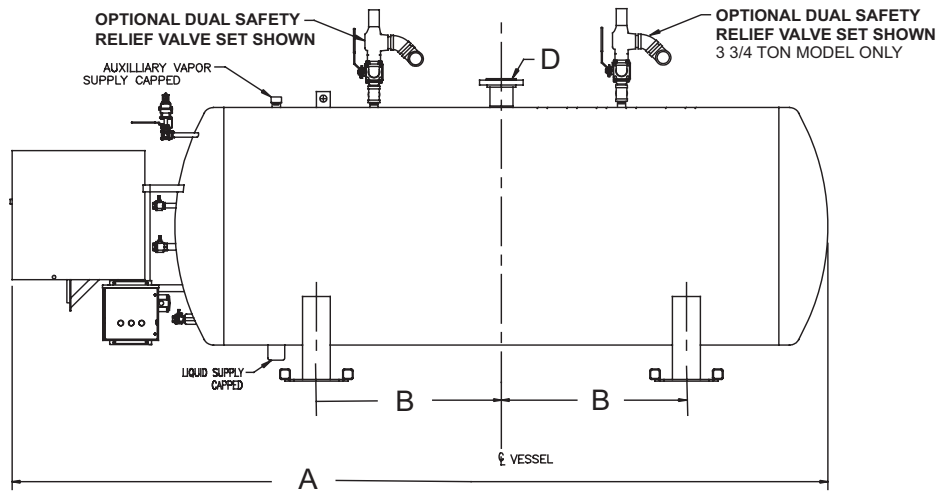



Size (Tons)	Part Number	A *Allow 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight Empty
3 3/4	7048H03X	11 ft. 10 in. (3606.8 mm)	1 ft. 8 in. (501.6 mm)	5 ft. 9 in. (1754.1 mm)	6 in. (152.4 mm)	7,500 lb. (3,402 kg)
4	7048H04X	12 ft. 10 in. (3912 mm)	1 ft. 11.5 in. (596.9 mm)	5 ft. 9 in. (1754.1 mm)	6 in. (152.4 mm)	7,730 lb. (3,507 kg)
6	7048H06X 7148H06X	15 ft. 6 in. (4724.4 mm)	2 ft. 8 in. (812.8 mm)	5 ft. 9 in. (1754.1 mm)	6 in. (152.4 mm)	9,000 lb. (3,359 kg)
8	7048H08X 7148H08X	19 ft. 6 in. (5943.6 mm)	4 ft. 5 in. (1346.2 mm)	5 ft. 9 in. (1754.1 mm)	6 in. (152.4 mm)	10,200 lb. (4,627 kg)
10	7048H10X	23 ft. 4 in. (7112 mm)	6 ft. 3 in. (1892.3 mm)	5 ft. 9 in. (1754.1 mm)	8 in. (203.2 mm)	11,500 lb. (5,216 kg)
12	7048H12X	26 ft. 2 in. (7975.6 mm)	7 ft. 9 in. (2362.2 mm)	5 ft. 9 in. (1754.1 mm)	8 in. (203.2 mm)	12,650 lb. (5,738 kg)

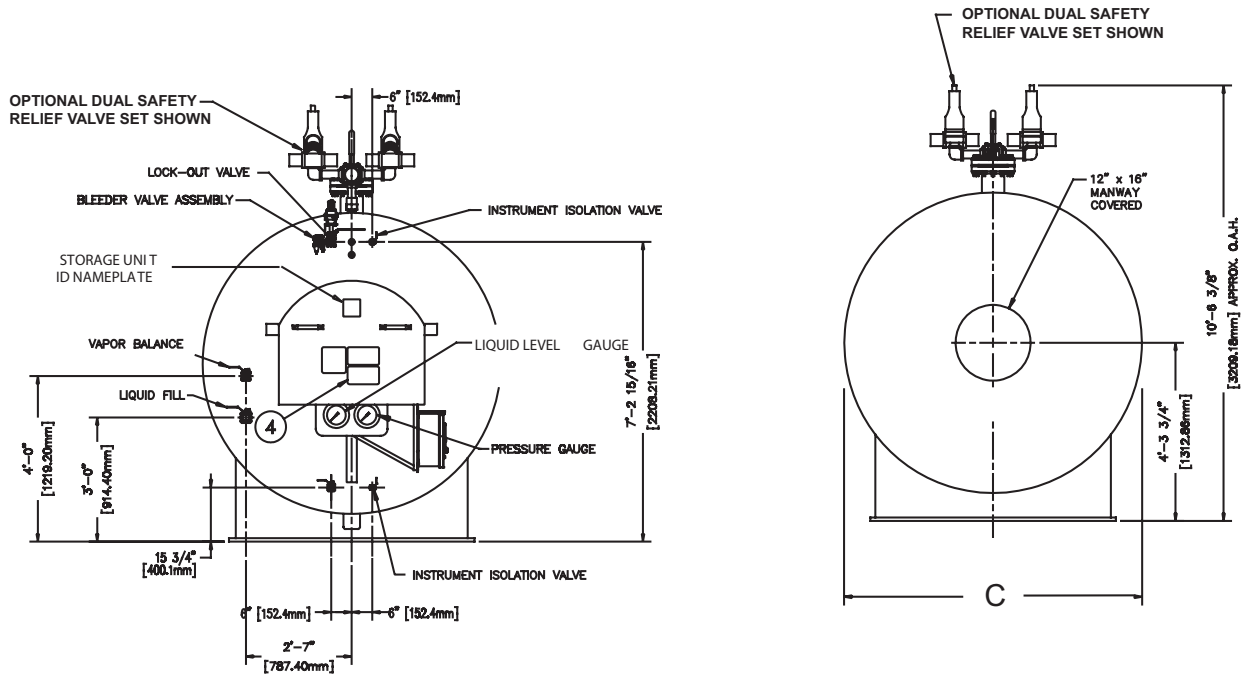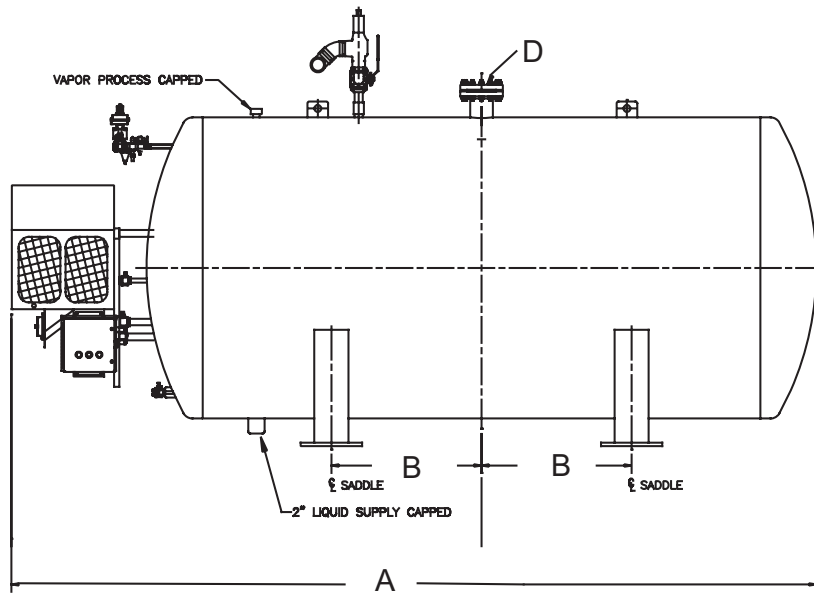




Size (Tons)	Part Number	A *Add 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight (Empty)
14	7048H14X	19 ft. 8 in. (5994.4 mm)	3 ft. 8 in. (1117.6 mm)	7 ft. 4 in. (2235.2 mm)	8 in. (203.2 mm)	14,000 lb. (6350.3 kg)

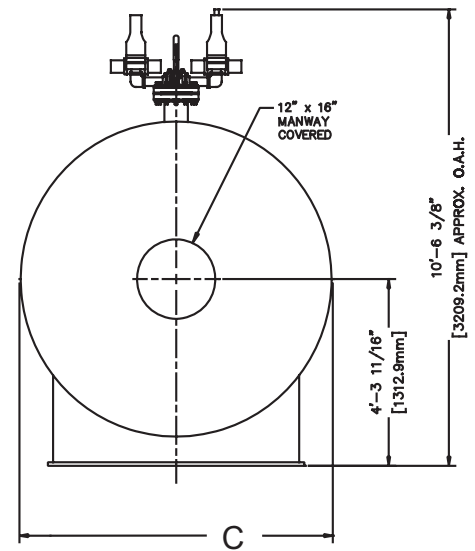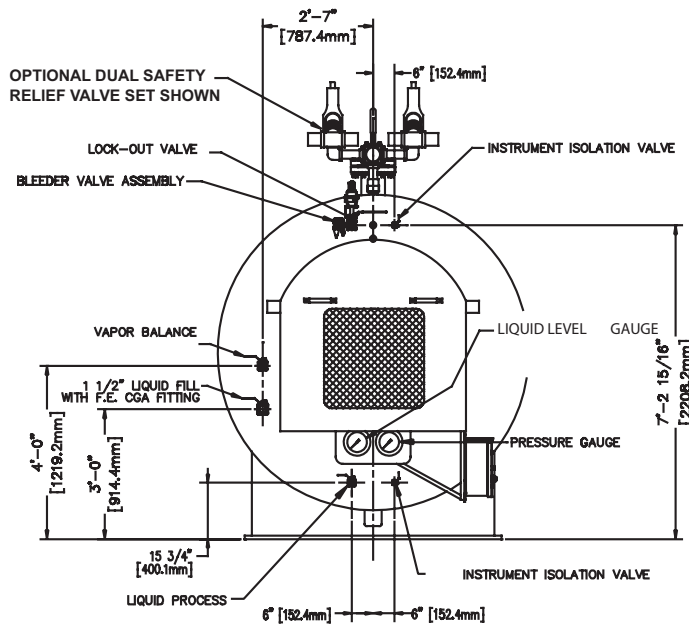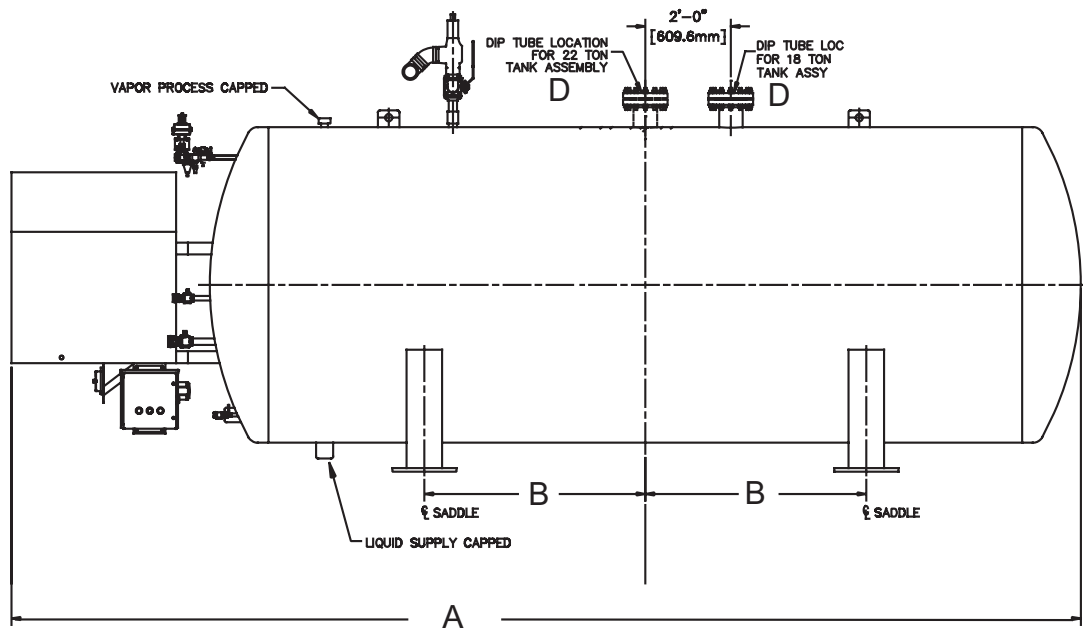




Size (Tons)	Part Number	A *Allow 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight (Empty)
18	7048H18X	25 ft. 0 in. (7620.0 mm)	5 ft. 2 in. (1574.8 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	16,800 lb. (7,620 kg)
22	7048H22X	29 ft. 4 in. (8940.8 mm)	7 ft. 0 in. (2133.6 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	19,000 lb. (8,618 kg)

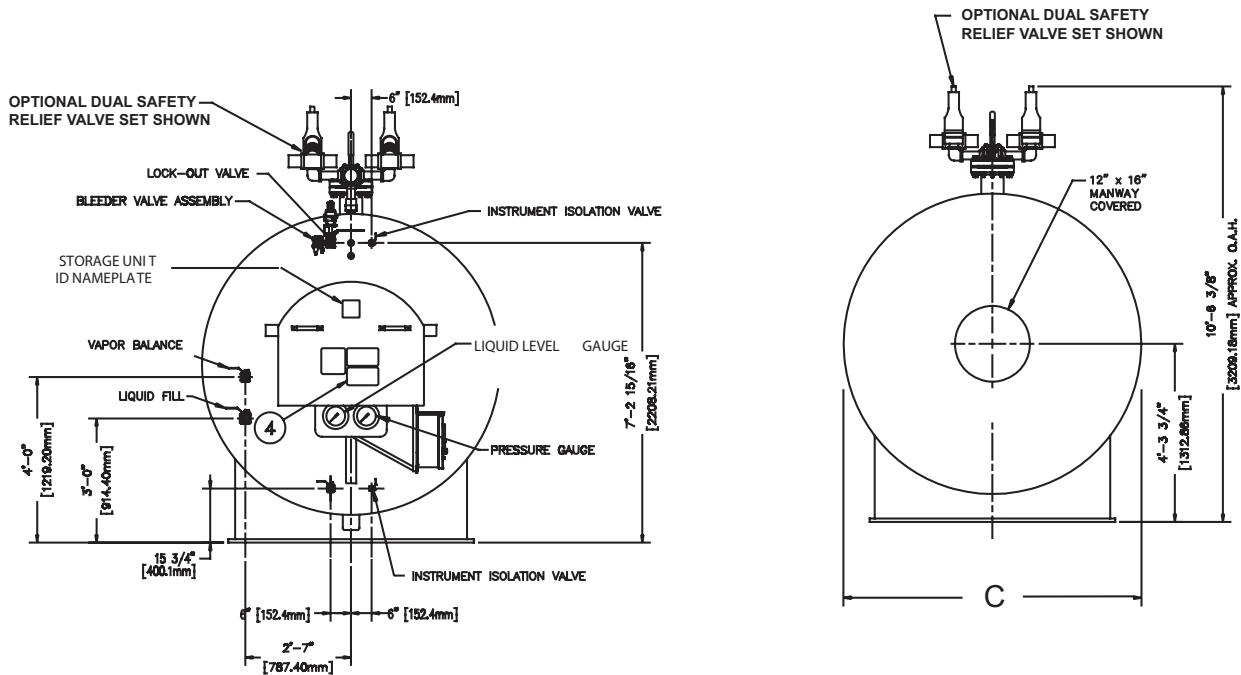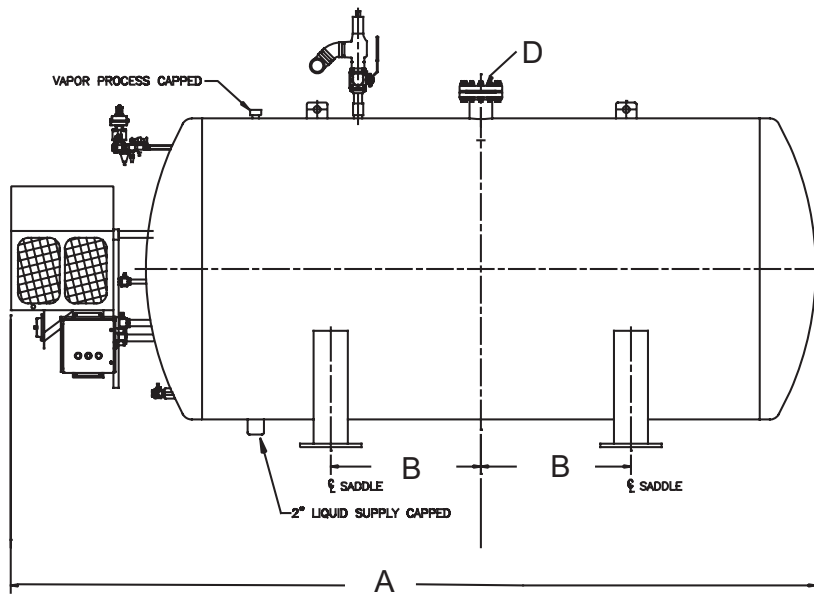


Size (Tons)	Part Number	A *Allow 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight (Empty)
26	7048H26X	32 ft. 8 in. (9953.4 mm)	9 ft. 0 in. (2743.2 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	23,500 lb. (10,659 kg)

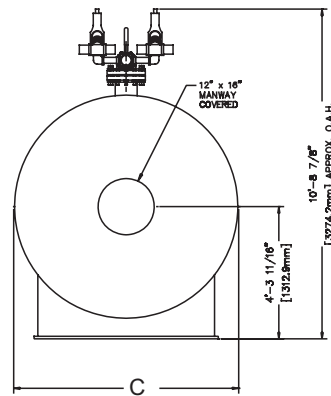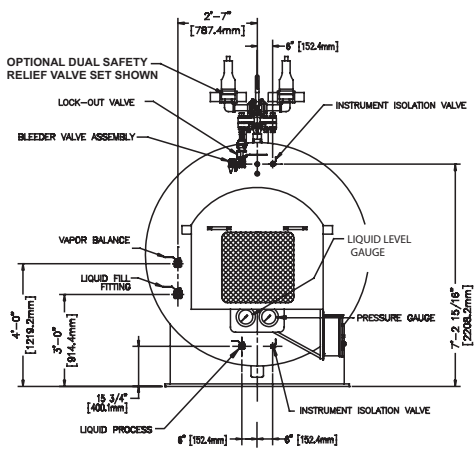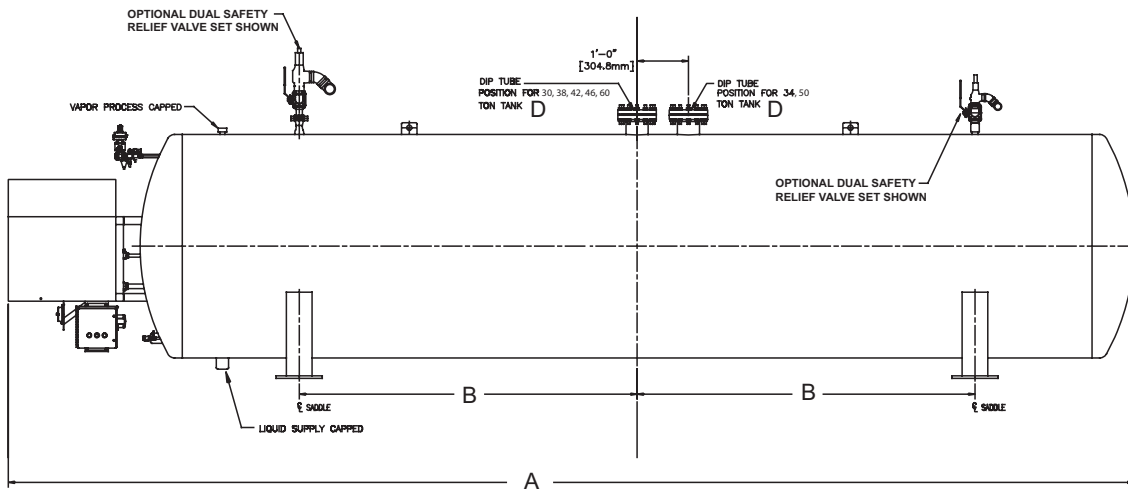

Size (Tons)	Part Number	A *Allow 4ft. 0in. (1219.2mm) for Open Door Clearance	B	C	D	Weight Empty
30	7048H30X	36 ft. 8 in. (11172.6 mm)	11 ft. 0 in. (3352.8 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	26,500 lb. (12,020 kg)
34	7048H34X	40 ft. 8 in. (12391.8 mm)	13 ft. 0 in. (3962.4 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	29,000 lb. (13,154 kg)
38	7048H38X	44 ft. 8 in. (13611.2 mm)	15 ft. 0 in. (4572.0 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	31,500 lb. (14288 kg)
42	7048H42X	48 ft. 8 in. (14830.4 mm)	17 ft. 0 in. (5181.6 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	34,000 lb. (15,422 kg)
46	7048H46X	52 ft. 8 in. (16049.6 mm)	19 ft. 0 in. (5791.2 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	36,500 lb. (16,556 kg)
50	7048H50X	56 ft. 8 in. (17268.8 mm)	19 ft. 0 in. (5791.2 mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	40,000 lb. (18,143 kg)
60	7048H60X	66 ft. 8 in. (20316.8 mm)	24 ft. 0 in. (7315.2mm)	7 ft. 4 in. (2234.4 mm)	8 in. (203.2 mm)	45,000 lb. (20,411 kg)


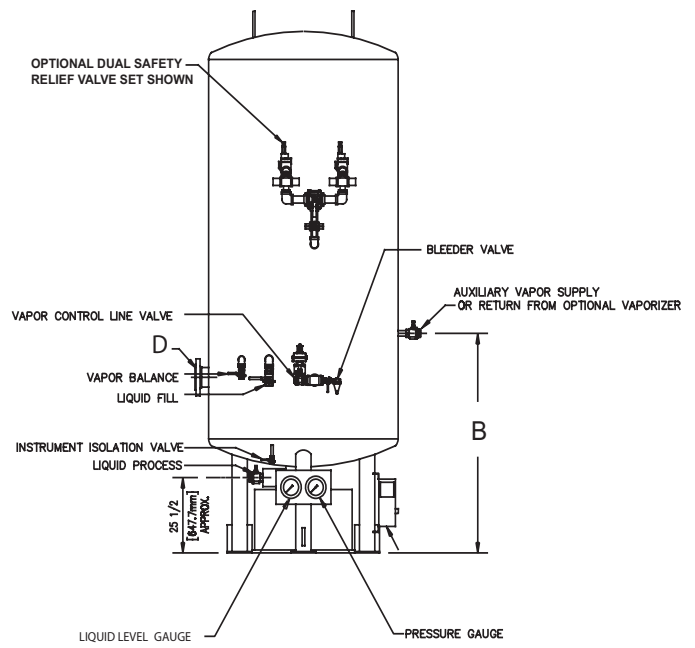
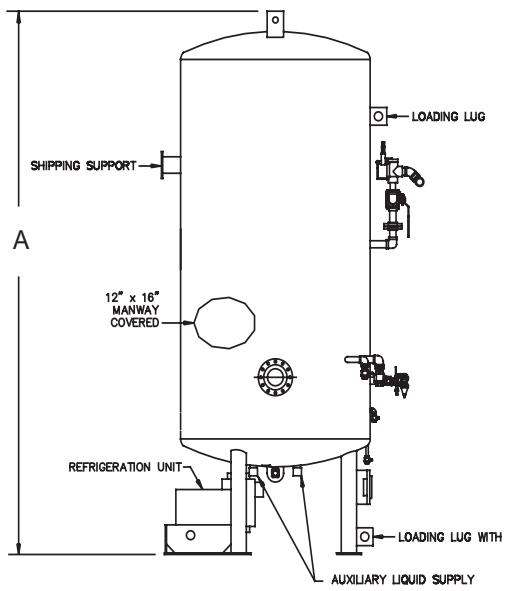


BOTTOM VIEW OF UNIT




TO P VIEW OF UNIT

Size (Tons)	Part Number	A	B	C	D	Weight (Empty)
6	7048V06X	15 ft. 3 in. (4648.2 mm)	6 ft. 3 in. (1889.1 mm)	7 ft. 11 in. (2400.3 mm)	6 in. (152.4 mm)	10,000 lb. (4,535 kg)

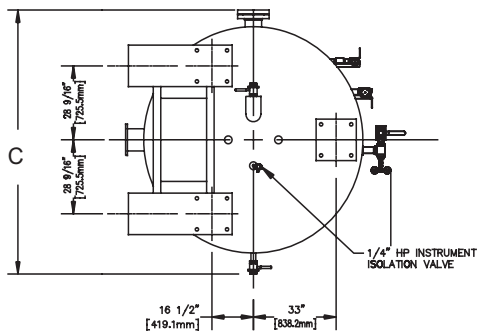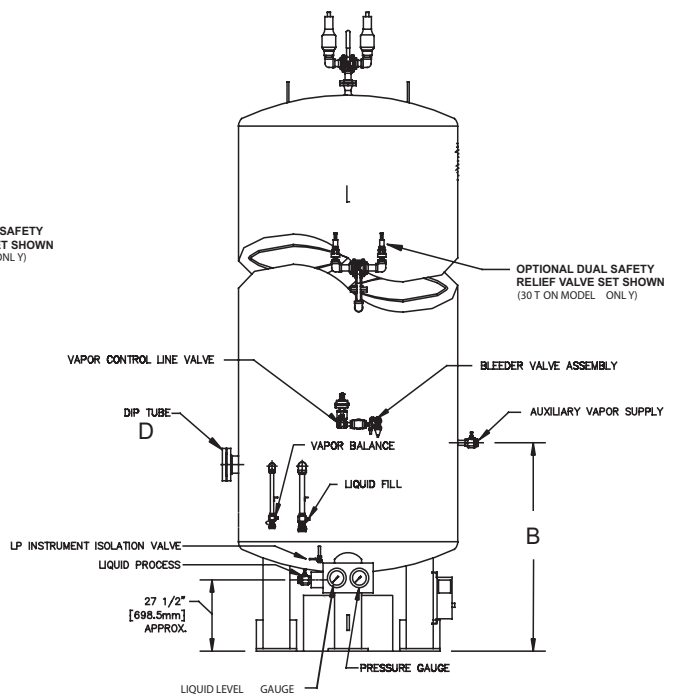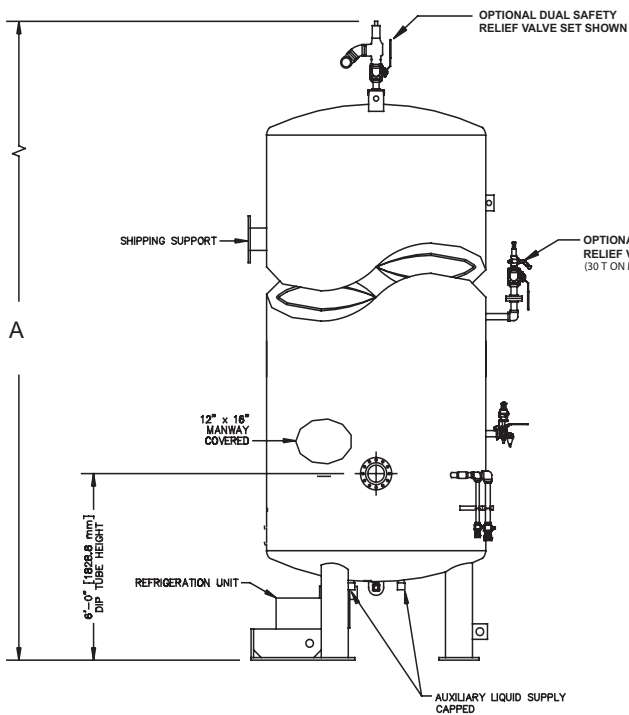

BOTTOM VIEW OF UNIT

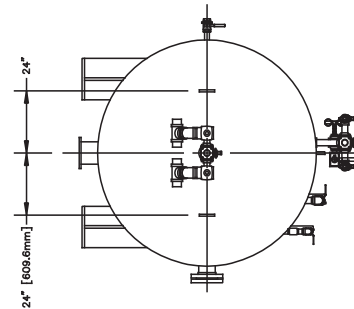

TOP VIEW OF UNIT

Size (Tons)	Part Number	A	B	C	D	Weight (Empty)
14	7048V14X	22 ft. 4 in. (6807.2m m)	6 ft. 7 in. (1993.9 mm)	8 ft. 9 in. (2667 mm)	6 in. (152.4 mm)	15,500 lb. (7,030 kg)
26	7048V26X	33 ft. 8 in. (10261.6 mm)	6 ft. 7 in. (1993.9 mm)	8 ft. 9 in. (2667 mm)	6 in. (152.4 mm)	25,000 lb. (11,339 kg)
30	7048V30X	37 ft. 5 in. (11404.6 mm)	6 ft. 7 in. (1993.9mm)	8 ft. 9 in. (2667 mm)	6 in. (152.4 mm)	30,000 lb. (13,607 kg)

EXPORT INFORMATION (USA)
Jurisdiction: EAR
US ECCN: EAR99

CARDOX is a registered trademarks of Kidde-Fenwal, Inc. All other trademarks are the property of their respective owners.

This literature is provided for informational purposes only. Chemetron Fire Systems assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular question, contact Chemetron Fire Systems.

CHEMETRON
Fire Systems™