

Model 43T Vibrating Bell



A UTC Fire & Security Company

F-75-009

FEATURES

- UL Listed for Fire Protective Service
- 10-in. Shell, 115 VAC
- Mounting options for surface, semi-flush, outdoor, and concealed conduit installation
- Screw terminals permit fast in-out field wiring of 12 to 18 AWG wire
- Red textured finish to improve appearance and durability

DESCRIPTION

The Model 43T Vibrating Bell provides a superior engineered vibrating bell for fire and life safety alarm systems. Incorporating higher dBA, low current draw and using low frequency aluminum shells for better audibility, it offers durable operation and reliable performance.



ORDERING INFORMATION


Model Number	Part Number	Input Voltage	Shell Size	dBA @ 10 ft.	Current (Amps)
43T-G10-115--R	75-000031-001	115 VAC	10"	88	0.085

Note: Typical dBA @ 10 ft. is measured in anechoic chamber.

MOUNTING OPTIONS

Model Number	Part Number	Mounting Option
SFP-R	75-000000-005	F
BB-R	75-000000-006	C
AP-R	75-000000-007	G
WBB-R	75-000000-008	E

Figure 1. Mounting Details

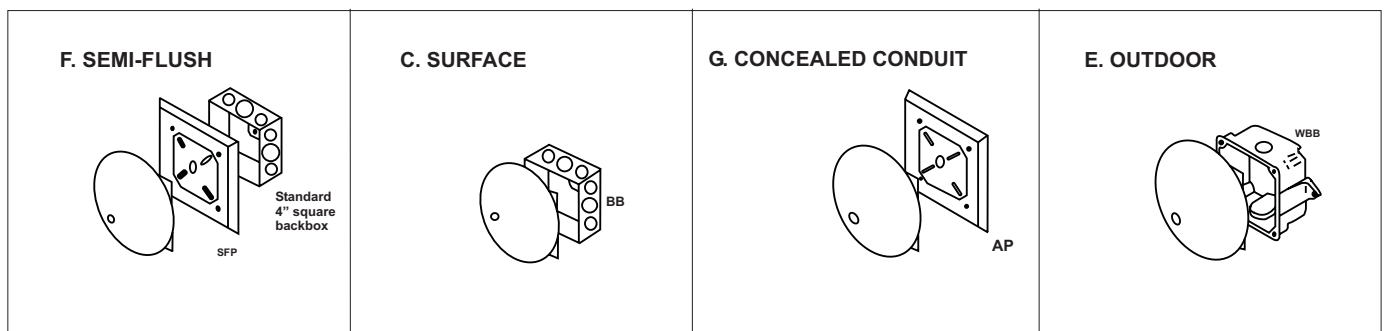

Note: Refer to Data Sheet 75-008.A for mounting hardware dimensions.

Fenwal is a registered trademark of Kidde-Fenwal Inc.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems
 A UTC Fire & Security Company
 400 Main Street
 Ashland, MA 01721
 Ph: 508.881.2000
 Fax: 508.881.8920
www.fenwalfire.com